



SIG Cavity Wall Insulation 34 Installation Manual For New Dwellings



www.sigdistribution.co.uk



SIG CWI 34

SIG CWI 34 insulation is a blown glass mineral wool insulation

- Designed with a specialist installation method for external masonry cavity walls
- Non-combustible
- Excellent thermal performance
- Suitable for new-build or retrofit

SIG CWI 34 Application

Designed for use in external masonry walls up to and including 12m in height, with nominal cavity widths not less than 90mm, in new domestic and non-domestic buildings.

The product may also be used in buildings over 12m in height where a height restriction waiver has been issued by SIG Retrofit System Support.





TECHNICIAN TRAINING, ASSESSMENT, APPROVAL AND INSPECTIONS	4
CAVITY WALL INSULATION TRAINING PROGRAMME	5
TYPICAL EQUIPMENT CHECK LIST	6
CUSTOMER CARE	7
PRE AND POST INSTALLATION CHECKS	8
DRILLING OPERATION	9
DRILLING PATTERN	10
INJECTION MACHINERY	13
QUALITY CHECKS	14
THE FILLING OPERATION	15
INSTALLED DENSITY CHECKS	17
MAKING GOOD	18
NEW BUILD SURVEY	19
NOTES	21

Technician Training, Assessment, Approval and Inspections

THE FOLLOWING IS A GUIDE TO TRAINING REQUIREMENTS PRIOR TO APPROVAL OF THE INSTALLATION TECHNICIAN.

EXISTING APPROVED INSTALLING COMPANY

- A training programme to be carried out by the installing company to include, company induction, health & safety, customer care and on-site training with qualified technician(s) covering all aspects of installation procedures
- Retrofit Installs - Attend an approved training centre for training course on flues, chimneys and combustion air ventilators (**NOTE:** Not to be completed online)
- Attend a SIG Retrofit System Support classroom training session as required. Continuation of on-site training with qualified technician(s) overseen by SIG Retrofit System Support (Technical System Support Manager)
- Technician assessment and approval. An assessment will be carried out by SIG Retrofit System Support (Technical System Support Manager) at the end of the training period to ascertain if the trainee technician is competent to become an approved technician. When approved the technician will be supplied with an ID card confirming approval and notification sent to British Board of Agrément (BBA)
- Technician ID card should be kept on person at all times for on-site inspection

NEW APPROVED INSTALLING COMPANY

- Technician training for a new approved installing company will be carried out under the guidance and supervision of SIG Retrofit System Support as the BBA System Certificate Holder
- Retrofit Installs - Attend an approved training centre for training course on flues, chimneys and combustion air ventilators (**NOTE:** Not to be completed online)
- Installing company training should include, introduction into the company, general health & safety and customer care
- Attend a SIG Retrofit System Support classroom training session which covers all basic installation procedures when installing cavity wall insulation
- Technician assessment and approval. An assessment will be carried out by SIG Retrofit System Support (Technical System Support Manager) at the end of the training period to ascertain if the trainee technician is competent to become an approved technician. When approved the technician will be supplied with an ID card confirming approval and notification sent to British Board of Agrément (BBA)
- Technician ID card should be kept on person at all times for on-site inspection

ON-SITE INSPECTIONS

- Following approval each Technician will be inspected on-site a minimum of four times in each year evenly spread throughout the year
- A technician's card will be withdrawn where it is shown that the technician no longer has the capability, intention or competence to undertake the installation in a correct manner

NOTE: Prior to assessment the following would be required:

- a) Copy of valid ACoP's certificate for flues, chimneys and combustion air ventilators
- b) Documentation from installing company listing training development
- c) Recent passport sized photograph

SIG Cavity Wall Insulation 34 Training Programme

Once all boxes are ticked, please contact your SIG Technical System Support Manager for assessment.

Company: _____

Approved installer: _____

Name of technician: _____

Starting date: _____

Person responsible for training: _____

- | | |
|---|---|
| <input type="checkbox"/> External ACoPs accreditation validated | <input type="checkbox"/> Fitting cavity barriers/brushes |
| <input type="checkbox"/> Induction course (office) | <input type="checkbox"/> Sleeving and reinstatement of air bricks |
| <input type="checkbox"/> On-site training | <input type="checkbox"/> Operation of blowing machine |
| <input type="checkbox"/> Health and safety | <input type="checkbox"/> On-site quality control (test box etc.) |
| <input type="checkbox"/> Customer care | <input type="checkbox"/> Filling operation |
| <input type="checkbox"/> Pre-installation checks | <input type="checkbox"/> Making good |
| <input type="checkbox"/> Drilling patterns | <input type="checkbox"/> Post-installation checks |
| <input type="checkbox"/> Drilling operation | <input type="checkbox"/> Flues and combustion air |

At the end of the training programme, SIG Retrofit System Support (Technical System Support Manager) will test the technician to ensure that he or she has acquired a good basic knowledge of installing Cavity Wall Insulation.

Declaration

This is to confirm that _____ has completed the above training
on the _____ System(s)

BBA no/s _____

Technical System Support Manager signature: _____

Technician's signature: _____

Date: _____

Representation of SIG Retrofit System Support Training Programme available on request.

Typical Equipment Check List

- ✓ Approved blowing machine (see page 13)
- ✓ Lorry or trailer
- ✓ SIG CWI 34 Installation kit, consisting of:

OPTION 1.

- ✓ 2 x 15m length hose @ 63mm diameter
- ✓ 1 x 15m length hose @ 51mm diameter
- ✓ 1 x 63mm-51mm reducer
- ✓ 1 x 63mm hose connector
- ✓ 4 x 63mm hose clips
- ✓ 1 x 51mm hose clip
- ✓ 1 x 32mm Powermax drill bit
- ✓ 1 x 30mm nozzle with ball valve
- ✓ 1 x 500mm x 500mm x 100mm test box (either a steel or a wooden box)

OPTION 2.

- ✓ 3 x 15m length hose @ 63mm diameter
- ✓ 2 x 63mm hose connectors
- ✓ 6 x 63mm hose clips
- ✓ 1 x 30mm ball valve nozzle
- ✓ 1 x 32mm Powermax drill bit
- ✓ 1 x 500mm x 500mm x 100mm test box (either a steel or a wooden box)

- ✓ 0 - 2 kg spring balance scales
- ✓ HSE approved extension ladders
- ✓ Additional approved access equipment as required
- ✓ Inspection lamps
- ✓ Drilling machines
- ✓ Hand tools, including chisel/hammer etc.
- ✓ Yard brush, shovel, dustpan & brush, rubbish bags
- ✓ Making good equipment: trowel, jointing bar/trowel, mortar hawk, mortar or sand & cement, range of colour pigments, rendering finishes, mixing bowl/bucket
- ✓ Personal protective equipment and access safety kit
- ✓ Tool kit: spanners, screwdrivers, hacksaw, hammer, pliers

Customer Care

THE FOLLOWING POINTS MAY SEEM OBVIOUS BUT IT IS IMPORTANT TO REMEMBER THAT THIS COULD BE THE CUSTOMER'S FIRST EXPERIENCE OF CWI.

PRE-INSTALLATION

- 1** Confirm that you are at the correct address and identify yourself to the site manager, presenting your credentials
- 2** Ensure vehicle is parked safely and not causing obstruction
- 3** Ensure with the site manager that you will have access to the property when required and, that no other trades will be present during installation
- 4** Identify and communicate any issues including defects to the site manager and report on work card before commencing work

DURING INSTALLATION

- 1** Avoid criticism of competitor companies and trades
- 2** Do not respond negatively to any complaints simply follow procedure by recording, referring to your company and assuring the customer that it will be dealt with in an efficient and timely manner
- 3** Ensure any damage caused however small is reported both to the site manager and to your company

POST-INSTALLATION

- 1** Remove all rubbish and thoroughly clean up any mess once work is complete
- 2** Ask the site manager to examine and inspect the work carried out and sign any appropriate compliance and satisfaction paperwork

Pre and Post Installation Checks

PRE-INSTALLATION CHECKS


Before installation commences, the installation crew should ensure the property is suitable and, familiarise themselves with the property details.

Refer to survey report on page 19-20



POST-INSTALLATION CHECKS

Checks must be carried out to ensure that the installation has been completed, and that no damage has occurred to the property.

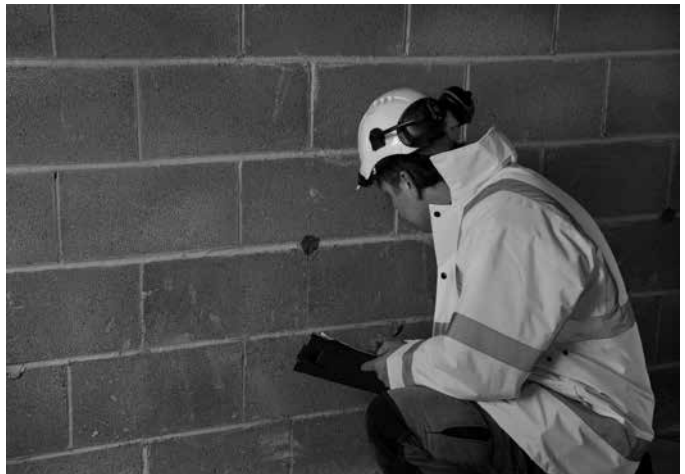

Drilling Operation

The property should be inspected and defects reported prior to SIG CWI 34 being installed.

With a new build property, installation is usually via the inner leaf, before the walls are plastered.

Drilling must be through the mortar joints, to avoid spalling to the cavity face of the blocks.

If drilling of facing brickwork is required, make sure the holes are drilled at the base of the mortar joint.

All drilling must be completed on one elevation and, at least 2m of the adjoining elevations, before injection commences on that elevation.

When drilling holes ensure the drill is at a 90° angle to the wall.


Every care should be taken to minimise the amount of debris that falls into the cavity.

Care should be taken when drilling next to building features. It is advisable to drill at least two courses below such features.


Injection must not be undertaken until all cavities are sealed.



Correct

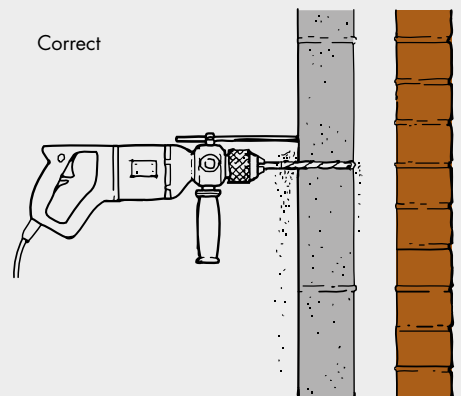

Incorrect

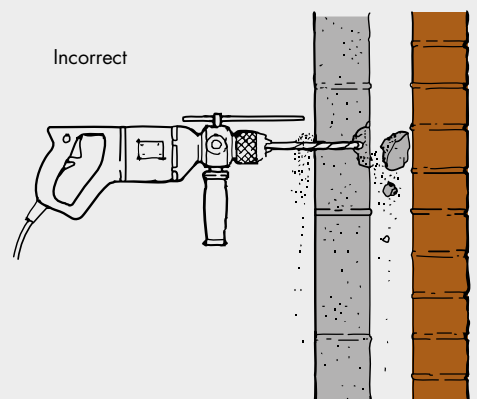

Drilling Pattern


HOLE DIAMETERS

- SIG CWI 34: 32mm

Subject to the constraints given below, the distance between successive injection holes should be a maximum of 1.35m.


Wherever possible, a diamond pattern should be used so that an injection hole in one row is midway between two holes in the rows above and below.

Diamond drilling pattern example

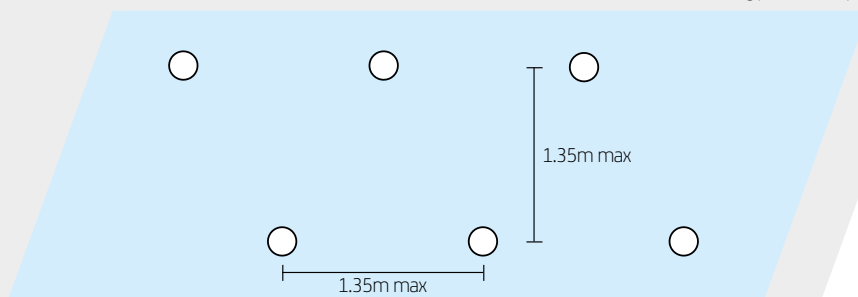

At the tops of walls and under gables, the topmost injection holes should not be more than 0.35m below the upper edge of the cavity to be filled. Additionally, under horizontal boundaries, e.g. under eaves, windows or lintels, the centres between the topmost injection holes should not exceed 1.0m.

Injection holes example

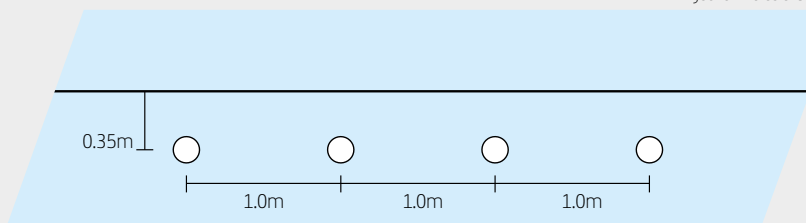


With sloping boundaries, for example under the eaves of a gable end, the centres between the successive injection holes should be between 1.0m and 1.35m depending on the slope of the boundary. The nearer the boundary is to the horizontal, the closer together the holes should be.

The lowest blowing holes should not be more than 0.8m above the horizontal DPC.


Extra injection holes will be required to ensure completeness of fill around building features. Where lintels project beyond a vertical cavity closure the 0.35m rule shall apply.

Projected lintels example

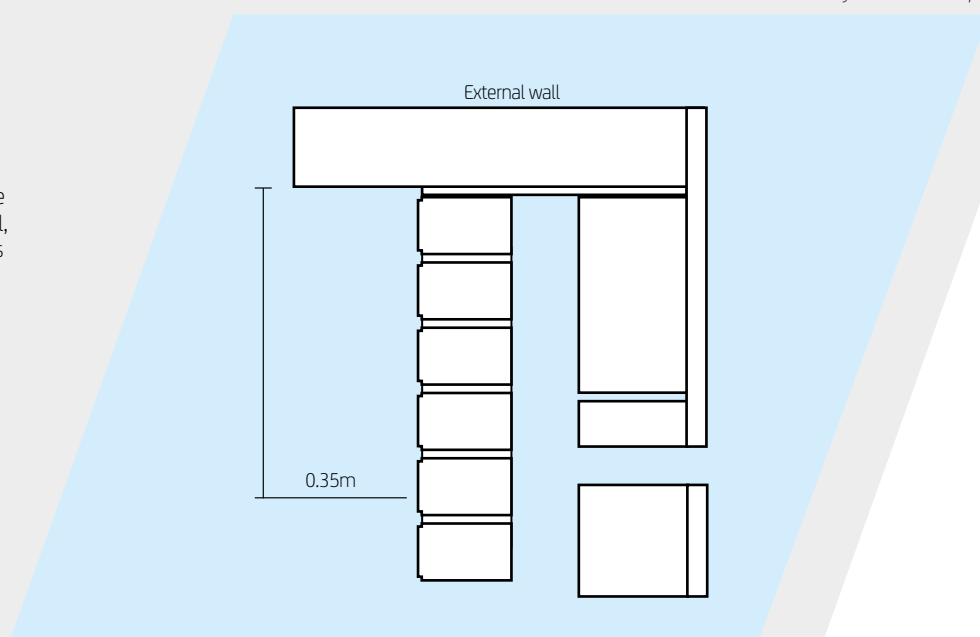


Drilling Pattern

TYPICAL SIG CWI 34 DRILLING PATTERN - FRONTAGE

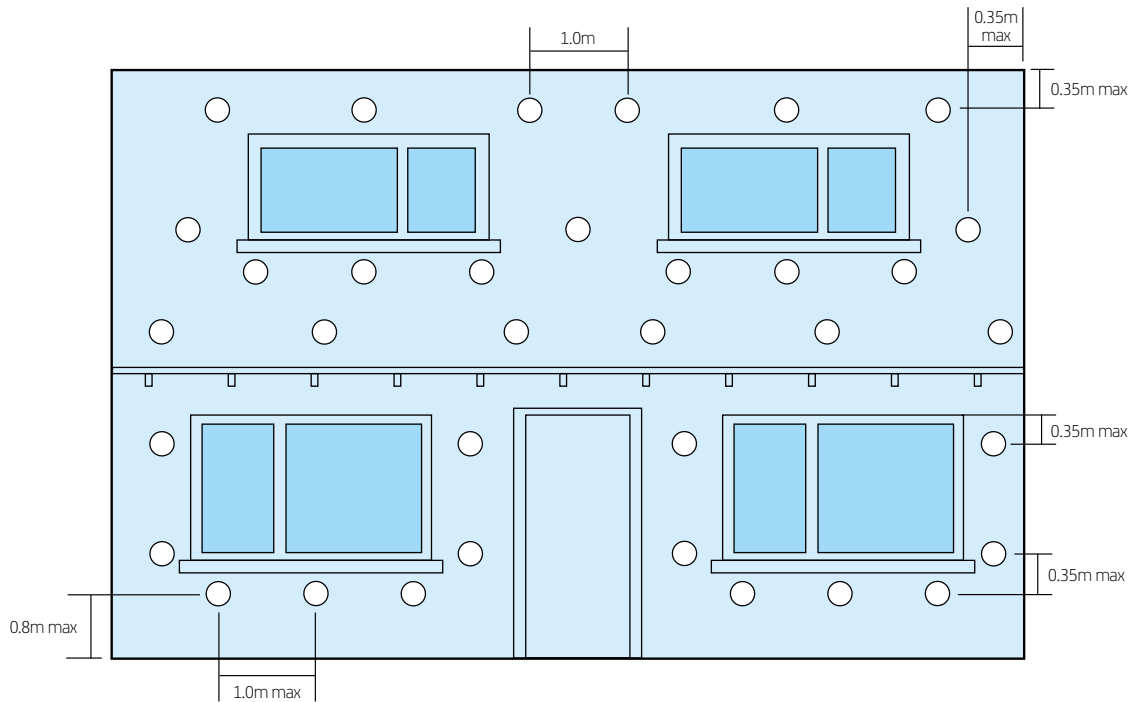


TYPICAL SIG CWI 34 DRILLING PATTERN - PLAIN GABLE END

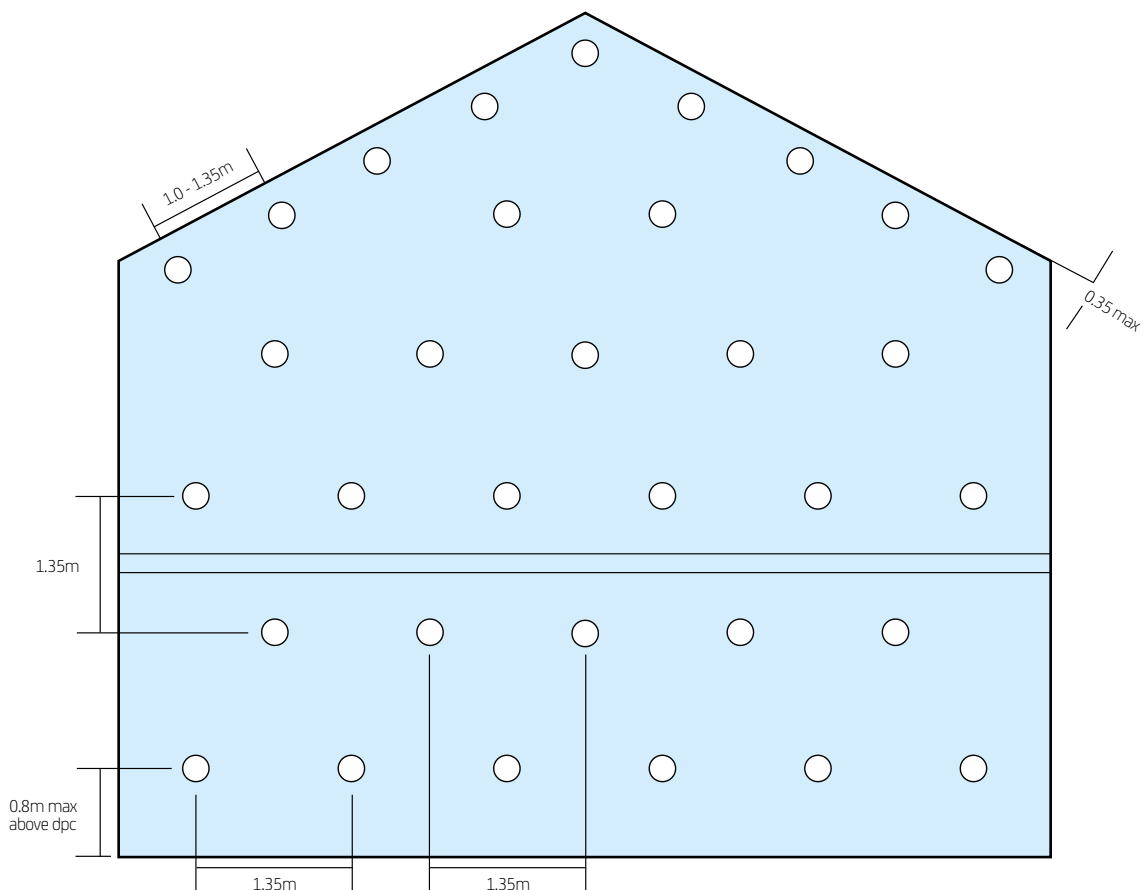

Drilling Pattern

TYPICAL DETACHED HOUSE ELEVATIONS

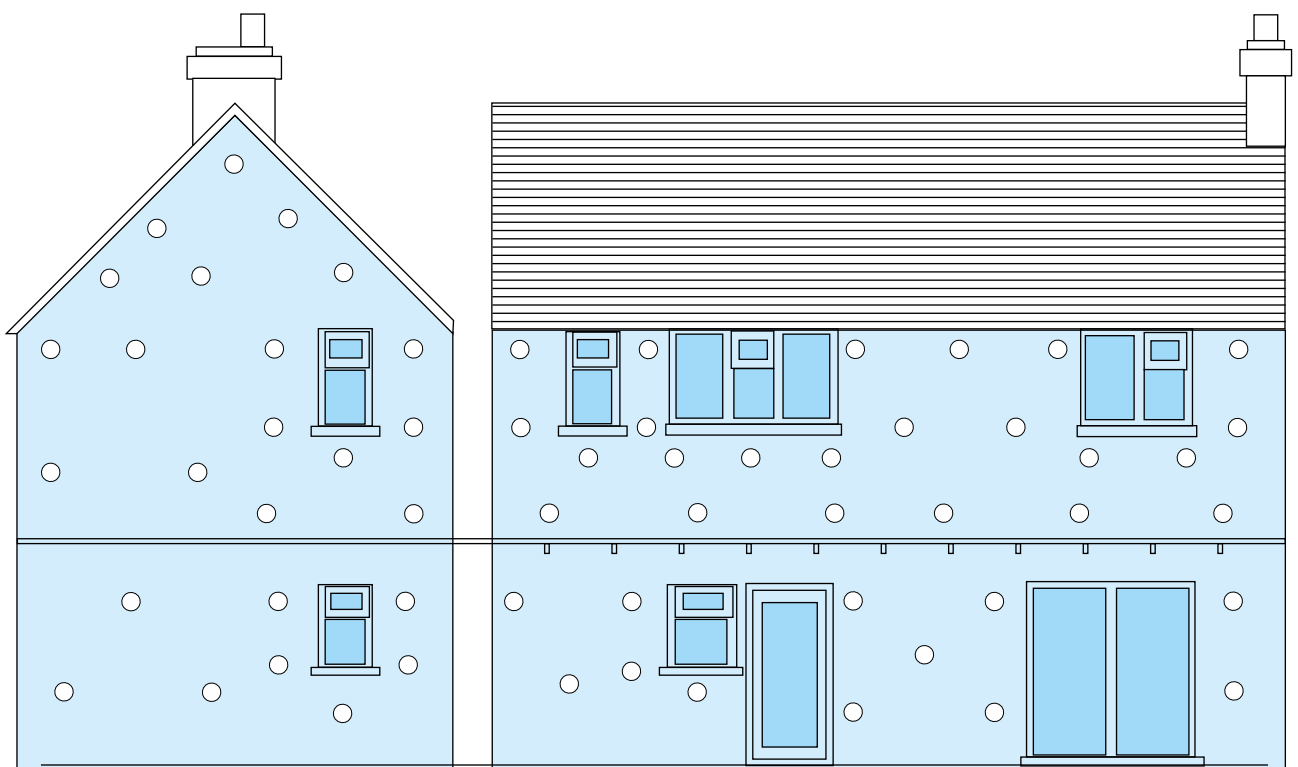

Injection Machinery


SIG CWI 34 insulation must be installed using an approved blowing machine.

The following blowing machines are approved by the British Board of Agrément (BBA) for equipment option 1 (see page 6 for full details):

- **Stewart Energy Diesel** (750 & 1000)
- **Stewart Energy Electric** (500)
- **Timco**
- **Krendl KR 2300**

The following blowing machines are approved by the British Board of Agrément (BBA) for equipment option 2 (see page 6 for full details):

- **Stewart Energy Diesel 750 Mk5**
- **Stewart Energy Diesel 1000 Mk4/Mk5** (200mm airlock as standard)

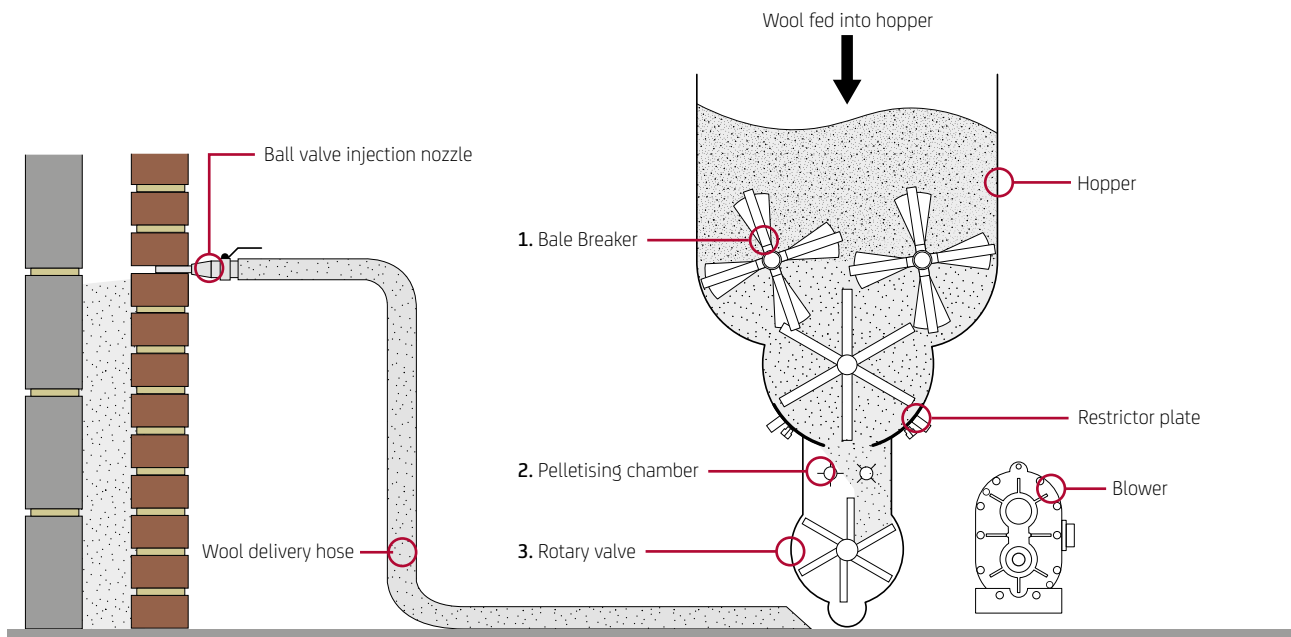

Each blowing machine is identified as being approved by a plate/label showing the BBA Certificate No. 15/5244 (SIG CWI 34).

As far as the handling and treatment of SIG CWI 34 is concerned, the blowing machines are virtually identical.

The job of each piece of equipment is detailed below:

- The BALE BREAKER opens up the compressed bale of blowing wool
- In the PELLETISING section, the bale is agitated
- The adjustable RESTRICTOR PLATE at the base of the pelletising chamber controls the wool residence time in the chamber, which in turn controls the pellet characteristics to achieve the required installed density
- As the processed insulation passes through the ROTARY VALVE it enters the airstream generated by the BLOWER and passes into the blowing hose and through the nozzle for delivery in to the cavity being insulated
- A pressure switch is connected to the machine control circuits, when actuated it causes the drive clutches to disengage thus stopping the blower and wool feed once the cavity wall area is filled to the required density
- An air adjustment control is fitted to all blowing machines and is used for control of the installed density

Quality Checks

The Blowing Wool to be used has been subjected to strict quality control procedures during manufacture and it is necessary to check that it has been kept clean and dry.

PRESSURE SWITCH

A daily calibration check should be carried out to ensure that the blowing machine pressure switch is operating correctly.

Start the engine and insert the nozzle into a breathable bag. Start blowing wool into the bag whilst watching the blowing pressure gauge. Block off the nozzle gently inside the bag. Blowing should cease when the correct pressure is achieved.

If necessary adjust the switch. To adjust, using a small screwdriver, turn the screw in to increase the pressure and out to lower the pressure.

NOTE

Additionally, the air adjustment control fitted to the blowing machines should be used for control of the density.

- To increase density - reduce air being dumped.
- To reduce density - increase air being dumped.

WOOL DENSITY CHECK

Fill the test box with wool and note the time taken (typically between 15 - 45 seconds).

Check visually that the box has been completely filled.

Empty the contents into a bag and weigh - the optimum weight for SIG CWI 34 is as follows:

Product	Weight (kg)	Installed density (kg/m ³)
SIG CWI 34	1.1 (±0.1)	25

If the weight is below the optimum weight, close the restrictor plate.

If the weight is greater than the optimum weight, open the restrictor plate.

Then blow into a bag to empty the pipe and re-fill the test box.

Re-check weight and repeat if necessary.



The Filling Operation

Filling should proceed from the bottom to the top of walls and from the most to the least restricted sections. Filling from the bottom ensures a uniform fill.

The blowing machine is simple to operate, 1 - 2 bales of wool can be emptied into the hopper at once. It is not recommended to allow the hopper to get less than half full. The feed rate is automatically controlled and the only necessary adjustment will be to the restrictor plate, air adjustment control or engine revs in order to obtain the correct density fill.

Insulant should be introduced into each injection hole in turn. Starting at one end of the elevation, at the bottom of the wall, work across from side to side.

The tip of the nozzle is inserted into the pre-drilled hole. Nozzle rotation is not required.

Once the blowing machine has started, the insulant will continue to flow at a steady rate until a signal from the pressure switch de-energises the clutches, indicating that the part of the cavity adjacent to the injection hole is now filled to within the nominal density required.


When filling of the hole is complete, shut off the ball valve before removing the nozzle.

Once the nozzle has been moved into the next injection hole, re-open the ball valve so that injection of insulant can continue by activating the start switch.




The Filling Operation

TYPICAL SIG CWI 34 FILLING PATTERN - FRONTAGE

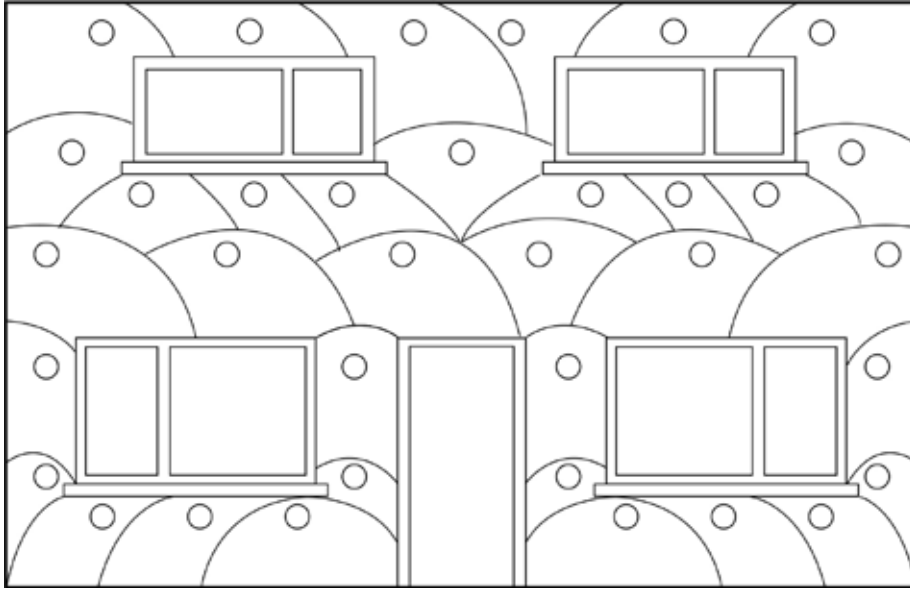

TYPICAL SIG CWI 34 FILLING PATTERN - PLAIN GABLE END

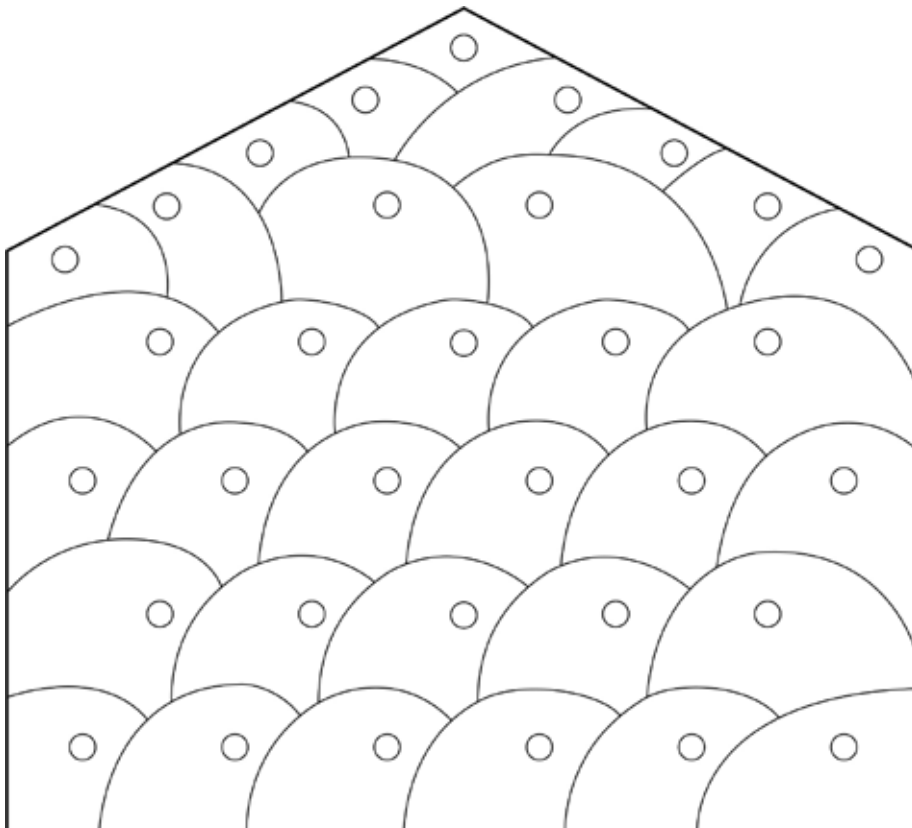

Installed Density Checks

INSTALLED DENSITY CHECKS

To check that the correct fill has been obtained, the number of bales used on site and average cavity width should be recorded on the work card and an average installed density calculated.



FOR EXAMPLE:

SIG CWI 34

Gross Area of Walls	185m ²		
Less Openings	30m ²		
Net Area	155m ²		
Average Cavity Width	100mm = 0.1		
Volume of Cavity	155m ² x 0.1	=	15.5m ³
No. of SIG CWI 34 Bags Used	25 x 15.5kg	=	387.5kg

			15.5m ³
			= 25kg/m ³

Cavity widths can vary considerably within one building. Therefore at least ten cavity width measurements should be made at various heights in the building.

(Cavity widths can tend to vary the greater distance from ground level).

NOTE:

For an average density of 25kg/m³ the following coverage can be obtained.

Cavity Width - mm	90	95	100	125	150
Coverage - m ² /bale	6.9	6.5	6.2	5.0	4.1

Making Good


The importance of making good after the installation cannot be over-emphasised. Leaving the property in the same condition that you found it in is the best possible recommendation and source of new leads.

MAKING GOOD HOLES

A mortar mix should be made up before the installation begins. That way the preceding holes can be made good while the next hole is filling. It is important to ensure that the entire hole is filled to the full depth of the block in order to prevent the transmission of noise.

CLEARING UP

Ensure any excess material is swept up and disposed of in the appropriate manner to ensure the site is left clean and tidy as you found it.

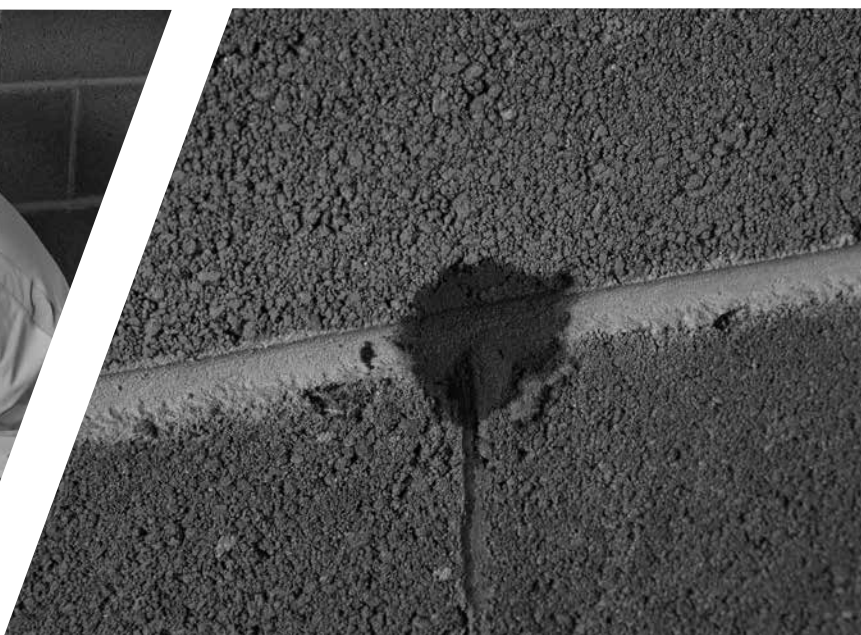

New Build Survey and Installation Report

FOR BUILDINGS UNDER CONSTRUCTION

SURVEYOR/TECHNICIAN DECLARATION

Material used: External Wall

SIG CWI 40: Y / N
 SIG CWI 34: Y / N
 Supafil Frame: Y / N
 Test box results: weight _____ kg
 time _____ seconds
 Number of bags installed: _____
 Batch number: _____
 Installed density: _____ kg/m³
 Cavity tray's present: Y / N
 Gable; Intermediate Floor: Lean to roof; DPC, Above window pier
 Where: _____

Do the gable apexes require insulating*: Y / N

*Gable apexes must be insulated if no cavity tray is present. The cavity must also be insulated if the gable apex forms part of a warm roof.

I confirm that I have inspected the building, according to Agrément Certificate Number _____ and the requirements of the BBA as far as can be practically determined from the visible construction, the building is suitable for installation.

Name: _____

Date: _____

Signature: _____

SITE AGENT

Technician sign in time: _____

Technician sign out time: _____

Material used: External Wall

SIG CWI 40: Y / N
 SIG CWI 34: Y / N
 Supafil Frame: Y / N
 Drill pattern inspected and compliant with system designer specification: Y / N
 Cavity tray's present: Y / N
 Where: _____

Material Used: Party Wall

SIG CWI Party Wall: Y / N
 Cavity tray present at each floor level: Y / N
 Do the gable apexes require insulating*: Y / N

*Gable apexes must be insulated if no cavity tray is present. The cavity must also be insulated if the gable apex forms part of a warm roof.

I acknowledge receipt of the survey form and confirm that it is factual. I also confirm that the cavity walls have been built according to the applicable regulators and standards. The cavity walls have been inspected during construction. I am not aware of defects in the construction of the cavity walls.

Name: _____

Date: _____

Signature: _____

New Build Survey and Installation Report

FOR BUILDINGS UNDER CONSTRUCTION

INSTALLERS JOB REFERENCE: _____

Technician 1 name: _____

Technician 2 name: _____

CSCS number: _____

CSCS number: _____

Date of installation: _____

Site address: _____

Client: _____

Client's order no: _____

House type: _____

To be installed according to Agrément Certificate No: _____

Special instructions to Surveyor and/or Technician: _____

Plot number: _____

DETAILS OF BUILDING TO BE INSULATED

Detached/semi/terrace/other – specify: _____

Areas of external cavity wall to remain uninsulated: _____

Expected cavity wall area to be filled: _____ sq.m

Expected party wall area to be filled: _____ sq.m

Design width of cavity: _____ mm

Design width of party wall cavity: _____ mm

Internal/external filling: _____

CONSTRUCTION

Type of brick/block: _____

Brick work complete: Y / N

Type of wall tie: _____

Weep holes to lintels: Y / N

Number of flues on outside walls: _____

Block work complete: Y / N

Mortar joints filled to external face, with weathered, bucket handle or birdsmouth jointing: Y / N

Eaves detail - sealed: Y / N

Measured width of cavity: _____ mm

Dpc free of significant mortar extrusions: Y / N

Height of building: _____ m

Cavity ties free of significant mortar build-up: Y / N

Measured area of cwi: _____ sq.m

Exposure of building satisfactory: Y / N

Roof complete: Y / N

Remedial works required before installation:

Cavity sealed at windows: Y / N

Remedial works to be undertaken by: client/installer

Air bricks sealed: Y / N

Note: The installation cannot be undertaken unless all answers are 'Y' (yes) or the remedial works have been completed. The operative shall document any remedial works he undertakes before, or during installation.

Meter box fitted: Y / N

COVERAGE RATES

SIG CWI 40											
Cavity Width - mm	50	55	60	65	70	75	80	85	90	95	100
Coverage - m ² /bale	19.53	17.80	16.30	15.00	14.00	13.00	12.20	10.90	10.80	10.30	9.80

SIG CWI 34					
Cavity Width - mm	90	95	100	125	150
Coverage - m ² /bale	6.90	6.50	6.20	5.00	4.10

SIG CWI PARTY WALL					
Cavity Width - mm	65	75	85	95	100
Coverage - m ² /bale	15.00	13.00	10.90	10.30	9.80

Lined area for notes, consisting of multiple horizontal lines.



Find out more 0330 123 1811
email: retrofit@sigplc.com
www.sigdistribution.co.uk



For more information please visit:
www.sigassured.co.uk

All rights reserved. No part of this publication may be reproduced or transmitted in any form, or by any means, electronic or mechanical including photocopy, recording or any information storage and retrieval system, without permission in writing from SIG Trading Ltd. No information contained within this publication can be used to compile any other printed or electronic directory or mailing list. Whilst every effort has been made to ensure accuracy, the publisher does not, under any circumstances, accept responsibility for errors or omissions and no representation or warranty is made in relation to the suitability of a product for a specific application. Copying of the images contained in this publication, in any form without the author's permission, is an unlawful act under the Copyright Designs and Patent Act 1988.

Ref. Version 3 - October 2020 ID - 34222